


General Specifications

Supply Input.....	+9V to 30V 2A <i>Examples:</i> Digikey part 102-1337-ND or 62-1047-ND (enclosed)
Dimensions.....	1.6" X 1.6" (40mm X 40mm) square, .687" (17.45mm) thick
Operating Modes.....	PC controlled or standalone
PC Control.....	Can control up to 16 EZcontrollers daisy chained together.
Communications Protocol.....	RS485. Can convert to RS232/USB with appropriate converter. Provision is made for future addition of CAN bus protocol.
Control Protocol.....	Compatible with devices that use the Cavo DT or OEM protocol. Can use EZCommander™ Windows application or serial terminal program such as HyperTerminal to issue commands.
Mating Connectors	AMP MTA 100 series. Recommended tools: Digikey A9982; or A1998 + A2031. (See Application Note 131021 for non-standard connector options.)
ADC Inputs	Signal Levels: <0.8V Vlow; >2V Vhigh (TTL compatible). Accurate to 8 bits; can be modified for 10-bit accuracy (details available).
Optical switches	Transistor optical switch with IC> 1 mA @ IF=20mA. <i>Examples:</i> Digikey QVA11134 or H21A1; Honeywell HOA1887-012 or HOA1870-33 (prewired); OPTEK OPB830W11 (prewired)
Operating Temperature.....	-20 to 85 °C PCB copper temperature
Relative Humidity.....	10% to 90% non condensing (operating and storage)

Model EZCTRL17-IO

12 Input 8 Output I/O Module

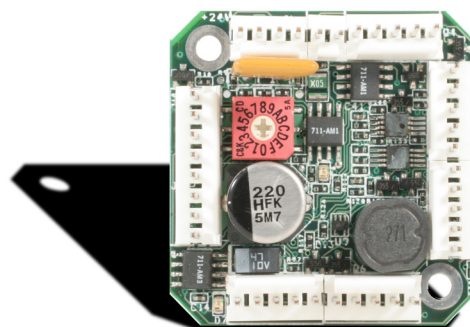

Model EZCTRL17-IO actual size

General I/O control with two opto-electronic/mechanical switch inputs, up to 12 (configurable) analog-to-digital (A/D) converter inputs, and 8 open-collector power outputs

INPUT CONNECTOR

Mating connector: AMP MTA 100 Series 8 pin, 26 GA, part 3-643815-8
Digikey part A31030-ND

Pin	Function	Notes
1	Switch input #2, A/D input #2	Includes 10k Ω pullup to 3.3V.
2	Switch input #1 A/D input #1	Includes 10k Ω pullup to 3.3V.
3	Opto sensor #2 LED	Includes series 200 Ω resistor to 5V. Resistor can be removed for applications that require direct access to 5V.
4	Opto sensor #2, A/D input #4	Includes 10k Ω pullup to 3.3V.
5	Opto Sensor #2 ground	Common input ground
6	Opto Sensor #1 LED	Includes series 200 Ω resistor to 5V. Resistor can be removed for applications that require direct access to 5V.
7	Opto Sensor #1 input, A/D input #3	Includes 10k Ω pullup to 3.3V.
8	Opto sensor #1 ground	Common input ground

CAN CONNECTOR

Mating connector: AMP MTA 100 Series 2 pin, 22 GA, part 3-643813-2
Digikey part A31107-ND

Pin	Function	Notes
1	CAN High	Not active at this time
2	CAN Low	Not active at this time

I/O BLOCK CONNECTORS

Mating connector: AMP MTA 100 Series 5 pin, 22 GA, part 3-643813-5
Digikey part A31027-ND


Pin	Function	Notes
1	V+ 9V to 30V	Power output
2	Power ground	Power return
3	2A Output	Open collector to ground
4	.7A Output	Normally open-collector output. Can be changed to analog (A/D) input at factory.
5	Axis Home Input	

POWER AND RS485 CONNECTOR

Mating connector: AMP MTA 100 Series 4 pin, 22 GA, part 3-643813-4 Digikey part A31108-ND

Pin	Function
1	V+ (external supply) +9V to 30V
2	Ground
3	RS485 B
4	RS485 A

Connector Locations

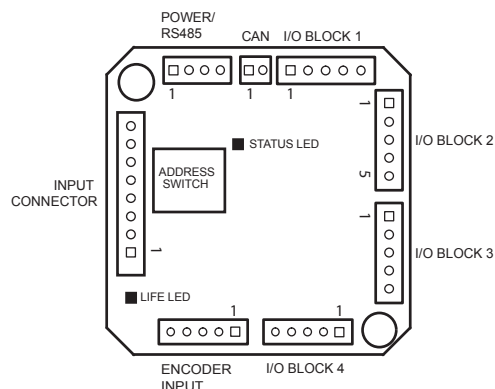


Key Features

- 12-input, 8-output I/O control
- 4-Channel temperature controller + driver
- +9V to 30V operation
- Pre-wired for opto-switch inputs.
- RS232, RS485, or USB-based communications
- Single 4-wire bus linking up to 16 controllers
- Switch-selectable device address
- Industry standard communications protocol
- Standalone operation with no connection to a PC

Mechanical Specifications

Model EZCTRL17-IO

12 Input 8 Output I/O Module

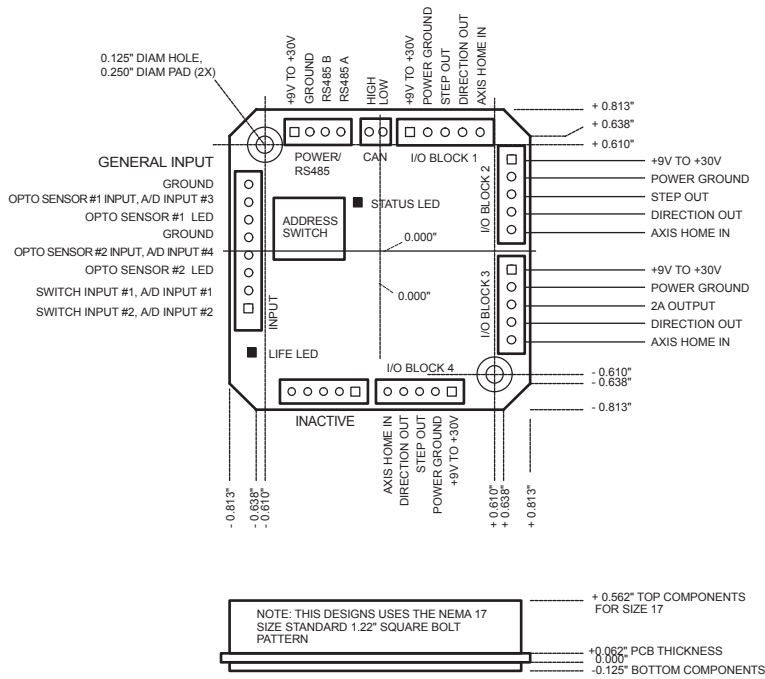

Ordering Information

Name	Order Number
I/O Module	EZCTRL17-IO
RS232 to 485 Converter (option).....	RS485
USB to 485 Converter (option)	USB485